


www.purepro.net

CARBON BLOCK FILTER

PUREPRO SERIES CARBON BLOCKS

Reduces taste / odor / chlorine and
certain VOC's from drinking water
Great chlorine removal capacity
competitive with most carbon blocks
Nominal 0.5, 1, 5, and 10 micron

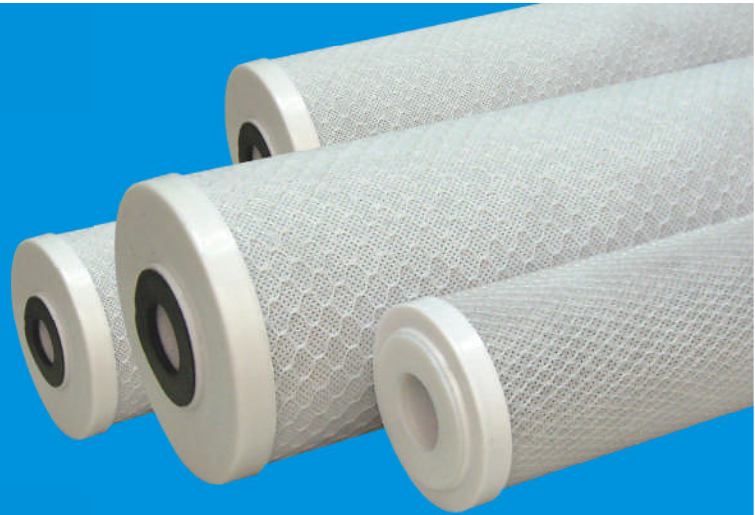

PurePro Series Carbon Blocks

are manufactured with high purity Coconut Shell activated carbon. You will find our wide range of lengths, diameters, and micron range an exceptional cost-to-performance value, making GAC filters obsolete by comparison.

With high performance, great dirt-holding capacity, and the absence of carbon fines, you will soon make the PurePro series your carbon block of choice.

PurePro Series Carbon Blocks


are ideal for point-of-use (POU) and reverse osmosis applications. These cartridges can be used in a wide range of applications such as residential, food service, commercial, and industrial. The PurePro series carbon blocks are great for displacing GAC (Granular Activated Carbon) and PAC (Powdered Activated Carbon) filters in application where high chlorine removal is needed. Because of your overall lower cost, our PurePro series are able to compete with most carbon blocks manufactured in the USA.

© PUREPRO USA CORP., ILLINOIS, U.S.A.


PUREPRO
DRINKING WATER SYSTEM

Pure-Pro Water Corp.

2.5" DIAMETER X 10" LENGTH

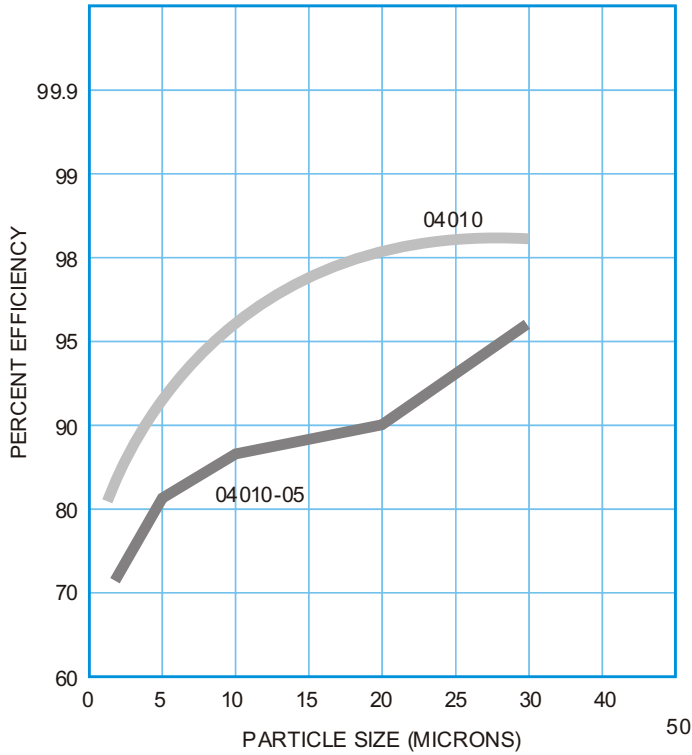

4.5" DIAMETER X 10" LENGTH

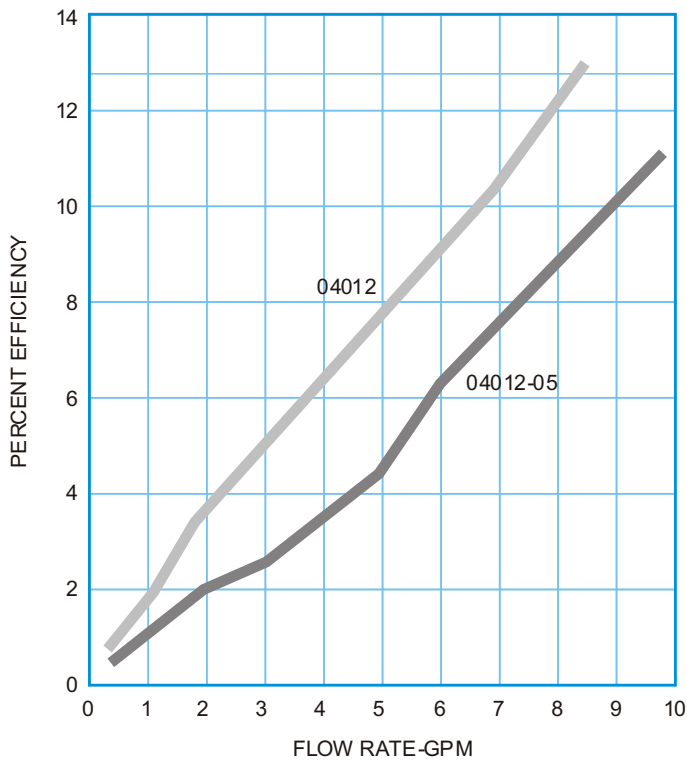

MATERIALS OF CONSTRUCTION

- CARBON COCONUT SHELL
- END CAPS POLYPROPYLENE
- OUTER WRAP POLYPROPYLENE
- INNER WRAP POLYPROPYLENE
- NETTING POLYPROPYLENE
- GASKETS NEOPRENE
- TEMP RATING 40°F TO 180°F

ITEM #	O.D. X LENGTH	WEIGHT*	CHLORINE CAPACITY*	MICRON RATING NOMINAL*	INITIAL P (PSI) @ FLOW RATE (GPM)*
04010	2.5" x 10"	12 lb	6,000 @ 0.75 GPM	1	4.0 psid @ 0.75 GPM
04010-05	2.5" x 10"	.99 lb	6,000 @ 1 GPM	5	2.0 psid @ 1.0 GPM
04011	2.5" x 20"	2.1 lb	12,000 @ 1.5 GPM	1	4.0 psid @ 1.5 GPM
04011-05	2.5" x 20"	1.8 lb	9,000 @ 2 GPM	5	2.0 psid @ 2.0 GPM



Tested and Certified by International under ANSI Standard 42 for material requirements only.

ITEM #	O.D. X LENGTH	WEIGHT*	CHLORINE CAPACITY*	MICRON RATING NOMINAL*	INITIAL P (PSI) @ FLOW RATE (GPM)*
04012	4.5" x 10"	3.2 lb	20,000 @ 2.50 GPM	1	7.0 psid @ 2.5 GPM
04012-05	4.5" x 10"	2.7 lb	12,000 @ 3.5 GPM	5	4.0 psid @ 3.5 GPM
04013	4.5" x 20"	6.4 lb	17,000 @ 1 GPM	1	6.5 psid @ 5.0 GPM
04013-05	4.5" x 20"	5.4 lb	26,000 @ 7 GPM	5	4.5 psid @ 7.0 GPM

*Weights, Chlorine Capacity, Micron Rating and Initial P (PSI) @ Flow rate tested by manufacturer and independent laboratory. Not Performance Tested or Certified by NSF.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Performance capacity depends on system design, flow rate and certain other application conditions. PurePro cartridges will contain a very small amount of carbon fines (very fine black powder). After installation follow the instructions for flushing the cartridge to remove all traces of the fines before using the water. You should run (flush) the tap at least 20 seconds prior to using water for drinking or cooking purposes. This is particularly important if the tap has not been used daily.

NOTE: Micron ratings based on 85% or greater removal of given particle size.

CARBON BLOCK FILTER

© PUREPRO USA CORP., ILLINOIS, U.S.A.